

## NUBE

### Version

Ceiling 90 cm - Inox

### Collection

Design+

### EAN code

8034122355405

## KACL.798#41F

Remote under-roof motor 950

m<sup>3</sup>/h


### Collection

Accessoires

### EAN code

8034122709833

## ENERGY LABEL

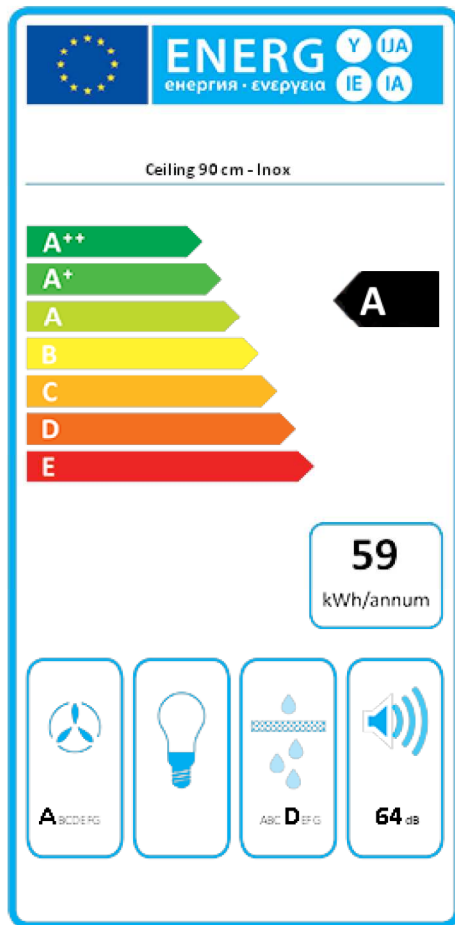

| PF                |                      |                   |
|-------------------|----------------------|-------------------|
| <b>S</b>          | Falmec Spa           |                   |
| <b>M</b>          | Ceiling 90 cm - Inox |                   |
| <b>AEC</b>        | 59,1                 | kWh/a             |
| <b>ECC</b>        | A                    |                   |
| <b>FDE</b>        | 29,5                 |                   |
| <b>FDEC</b>       | A                    |                   |
| <b>LE</b>         | 0,0                  |                   |
| <b>LEC</b>        | -                    |                   |
| <b>GFE</b>        | 65,1                 |                   |
| <b>GFEC</b>       | D                    |                   |
| <b>Qmin</b>       | 360,0                | m <sup>3</sup> /h |
| <b>Qmax</b>       | 630,0                | m <sup>3</sup> /h |
| <b>Qboost</b>     | 830,0                | m <sup>3</sup> /h |
| <b>SPEmin</b>     | 50                   | dBa               |
| <b>SPEmax</b>     | 64                   | dBa               |
| <b>SPEboost</b>   | 68                   | dBa               |
| <b>PO</b>         | -                    | W                 |
| <b>PS</b>         | 0,48                 | W                 |
| PI                |                      |                   |
| <b>F</b>          | 0,9                  |                   |
| <b>EEl</b>        | 51,7                 |                   |
| <b>Qbep</b>       | 441,0                | m <sup>3</sup> /h |
| <b>Pbep</b>       | 434                  | Pa                |
| <b>Qboost</b>     | 830,0                | m <sup>3</sup> /h |
| <b>Wbep</b>       | 180,0                | W                 |
| <b>WL</b>         | 0,00                 | W                 |
| <b>Emiddle</b>    | 0                    | lux               |
| <b>Lwa-SPEmax</b> | 64                   | dBa               |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.